

TECHNICAL SPECIFICATIONS

MODEL: PAC	1211	1811	2412	3612	3632	3634	6012	6032	6034	
COOLING CAPACITY	11,800	16,800	24,020	36,050			60,100			
VOLTAGE (V/Phase) at 60Hz	115/1		208-230/1		208-230/3	460/3	208-230/1	208-230/3	460/3	
AMPS	10.4	14.1	14.9	19.6	17.2	8.7	32	20.4	14.8	
TOTAL WATTS	1180	1670	2700	3620			6000			
IN-RUSH AMPS	60	75	68	113	93	60	178	162	87	
PLUG TYPE	5-15P LCDI	5-20P LCDI	6-20P LCDI	6-30P LCDI	L15-30P	L16-20P	6-50P	L15-30P	L16-20P	
EER	10.0		8.9	10.0						
COMPRESSOR	ROTARY	ROTARY	ROTARY	SCROLL			SCROLL			
COMPRESSOR HP	1	1.5	2	3	3	3	5	5	5	
COMPRESSOR LRA	50	63	48	83	77	35	158	137	52	
EVAPORATOR CFM - HIGH	400	600	810	1200			1950			
EVAPORATOR MOTOR HP	1/8		1/3			1				
CONDENSER CFM	580	930	1010	1390			2200			
CONDENSER MOTOR HP	1/8		1/3	1						
CONDENSATE TANK	5 Gallon - STANDARD (Pump Optional)						Pump - STANDARD (20 ft. Lift)			
R-410A CHARGE (oz.)	18	40	37	66			80			
HEIGHT (in.)	37-3/4	45-3/4		50-1/4			51-3/4			
WIDTH (in.)	20	24		27-1/2						
DEPTH (in.)	25	30			35			39-1/2		
NET WEIGHT (lb.)	180	260		365		400	485		520	

PACSPECS05012020

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge

COOLING AMBIENT OPERATING RANGE 65° TO 105°


NOT APPROVED FOR OUTDOOR USE




Cooling done Right!
OCEANAIRE
OCEANAIRE-INC.COM
OA-TS-PACSERIES-02112021

PRODUCT FEATURES

- OA 24 VOLT NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2 SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA LCDI POWER CORD (SOME MODELS)
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA THREE PHASE MONITOR (SOME MODELS)

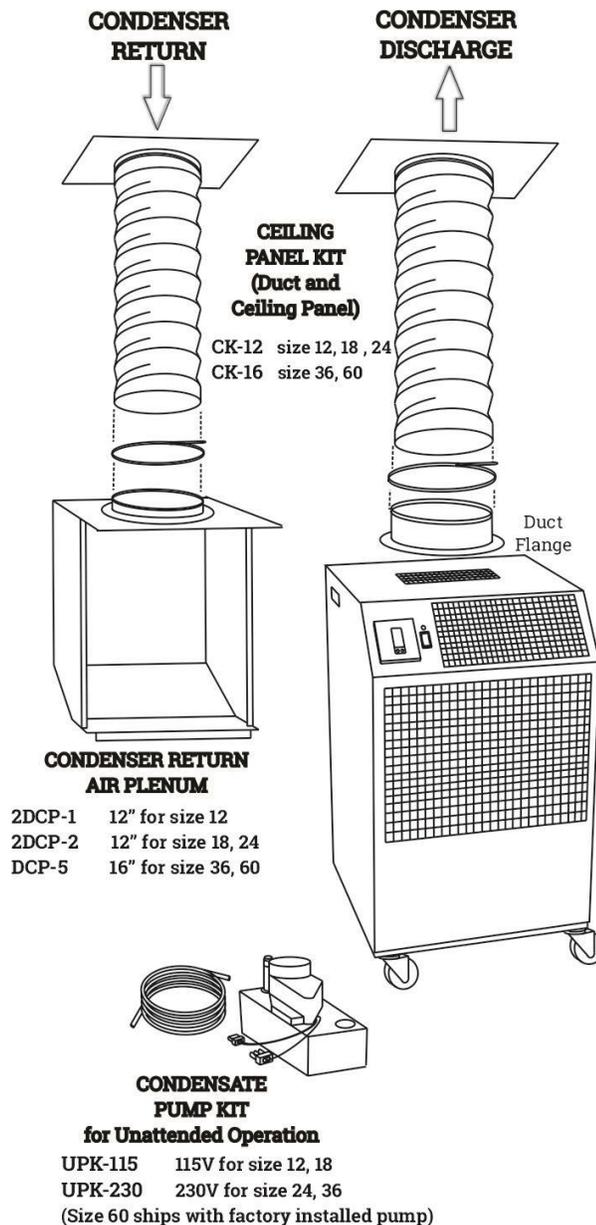


ACCESSORIES




NOZZLE KIT for Directional Cooling/Heating

- 2NK-1 2 x 4" for size 12
2NK-2 2 X 6" for size 18, 24
2NK-3 2 X 8" for size 36, 60



DISCHARGE DUCT ADAPTER for Extended Single Duct Length

- 2DDA-6 6" for size 12
2DDA-10 10" for size 18, 24
2DDA-16 16" for size 36, 60



EVAPORATOR RETURN AIR PLENUM

- DEP-10 10" for size 12
2DEP-12 12" for size 18, 24
DEP-16 16" for size 36, 60

Cooling done Right!

OCEANAIRE

OCEANAIRE-INC.COM

OA-TS-PACSERIES-02112021