

LIME Series

Mini & Maxi Pump Kits

Features & Specifications:

- Available in 24V, 115V, 230V
- Left or right install.
- Plastic lineset included.
- Clean and professional appearance.
- Easily accessed for filter cleaning.
- Built-in check valve.
- 3A NO/NC dry contacts rated @ 5A inductive @ 115/230V AC.

Duty Cycle:

- Mini - Continuous
- Maxi - 66% 10 mins on / 5 mins off

Capacity:

Mini - 11 LPH (3.7 GPH) @ zero head
Up to 30,000 BTU/hr

Maxi - 34 LPH (10 GPH) @ zero head
Up to 60,000 BTU/hr

Maximum Head:

Mini - 10m (33ft)
Maxi - 15m (49ft)




Sound Level:

Mini - 23dB(A)
Maxi - 35dB(A)

Pump Dimensions:

Mini -
L- 99mm x W- 44mm x H- 79mm
(L- 33/4" x W- 15/8" x H- 31/8")

Maxi-
L- 115mm x W- 44mm x H- 99mm
(L- 33/4" x W- 15/8" x H- 33/8")

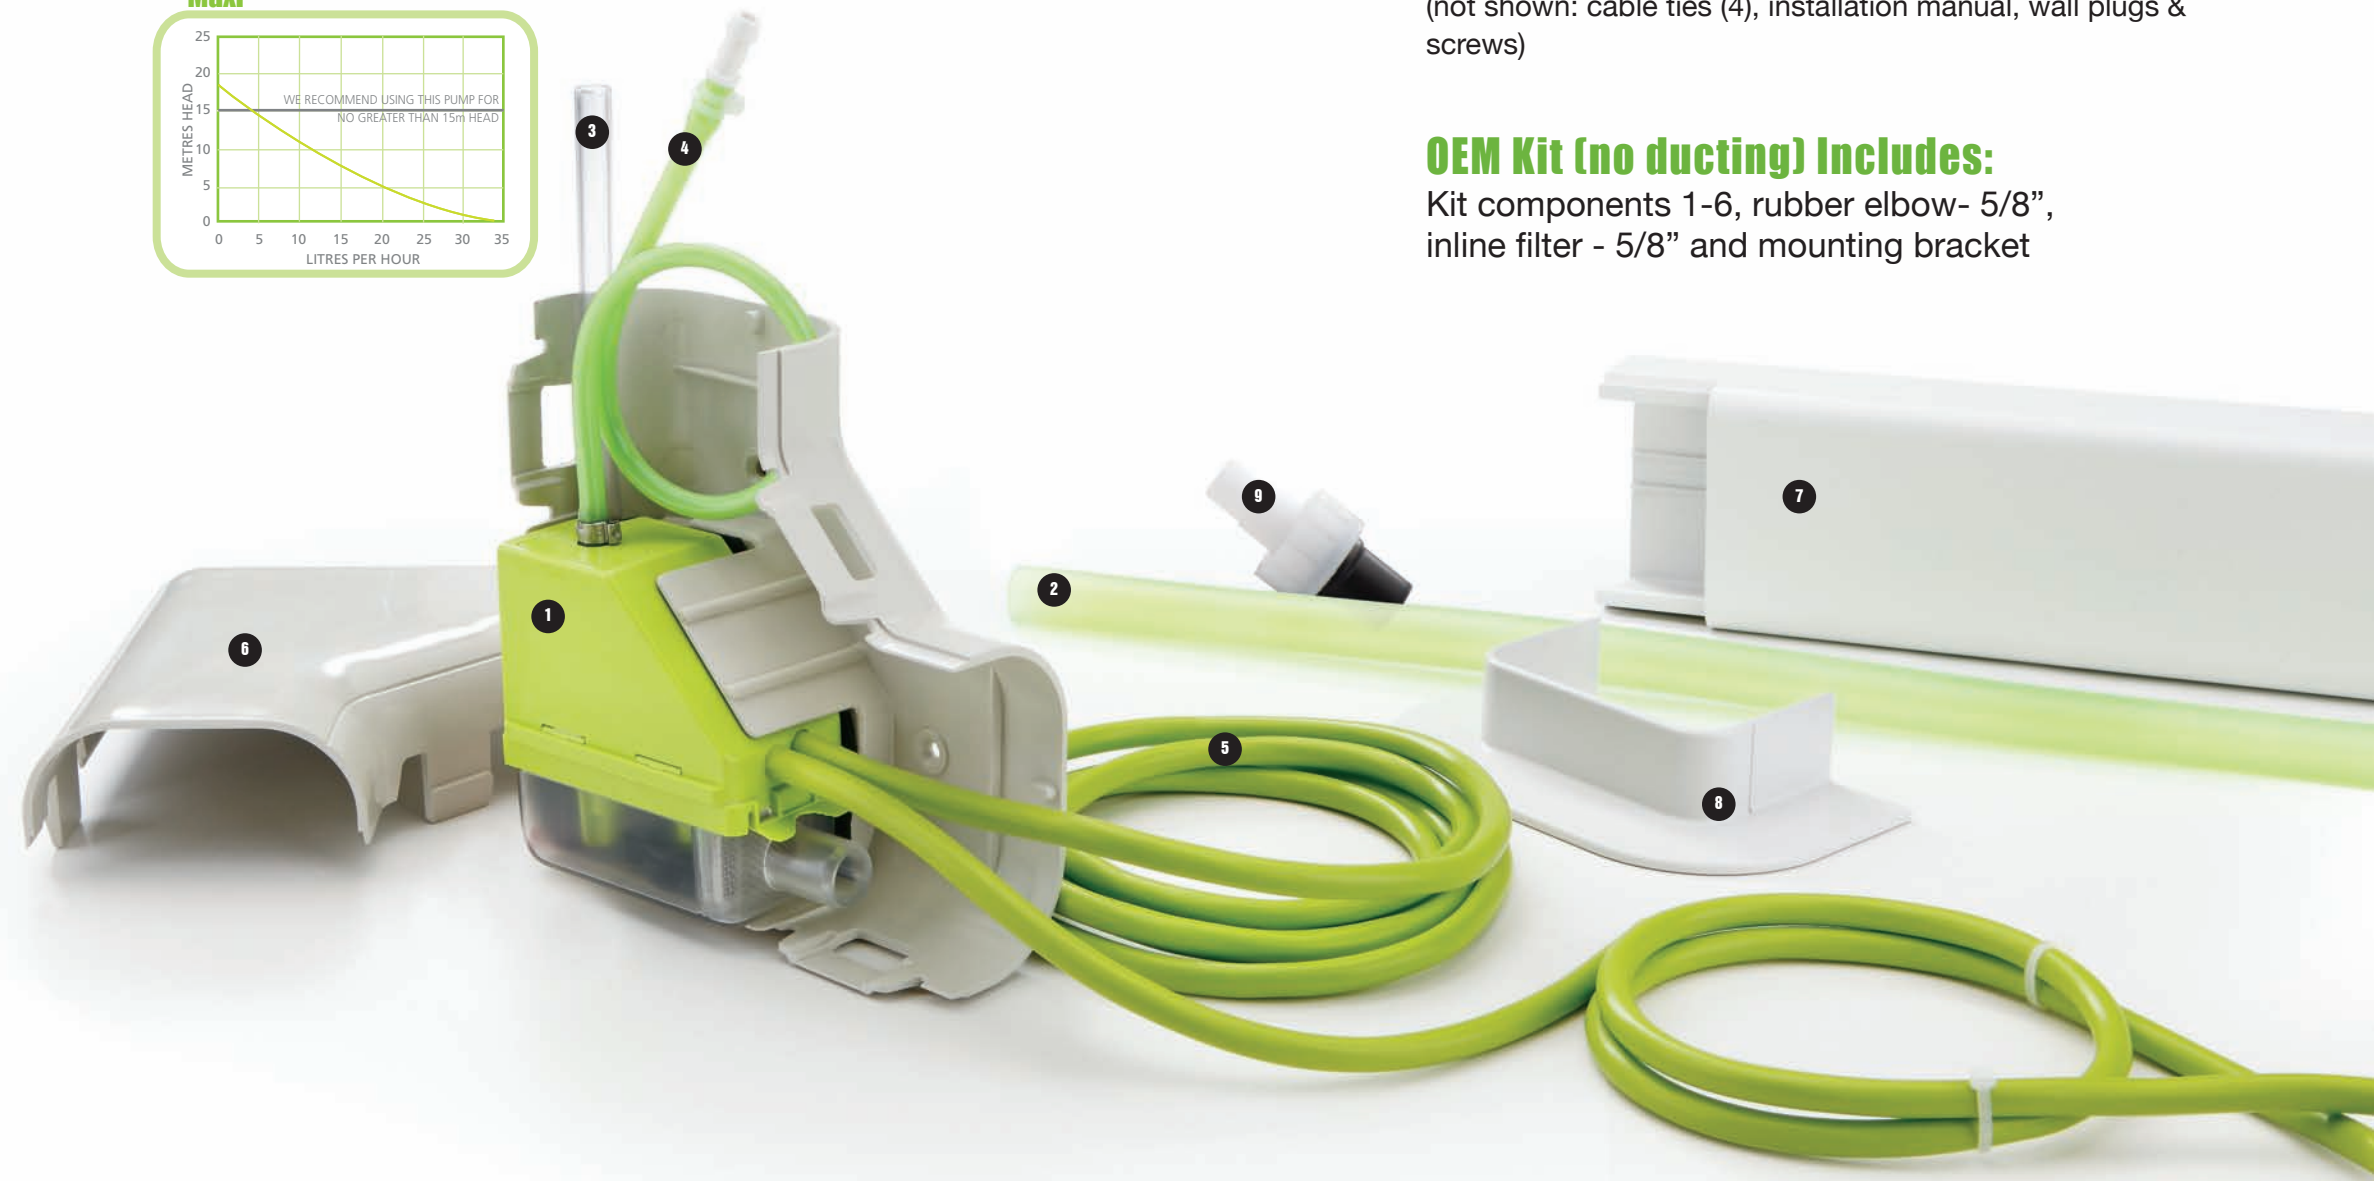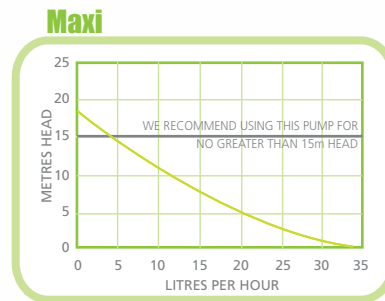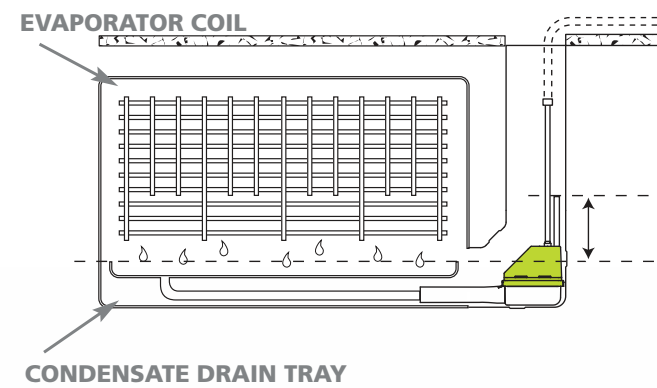

Kit Includes:

1. monobloc pump assembly
 2. inlet tube - 20" x 5/8 i.d.
 3. vinyl breather tube - 6" x 1/4 i.d.
 4. vinyl discharge tube - 30" x 1/4 i.d.
 5. power cable assembly - 6'
 6. lineset cover elbow
 7. lineset cover - 31" length
 8. ceiling plate
 9. drain hose adaptor
- (not shown: cable ties (4), installation manual, wall plugs & screws)

OEM Kit (no ducting) Includes:

Kit components 1-6, rubber elbow- 5/8", inline filter - 5/8" and mounting bracket

WIRING DIAGRAM SHOWING HOW TO WIRE MINI LIME CONDENSATE PUMP 208/230V WITH R410A INDOOR UNIT

IF CONDENSATE PUMP FAILS INDOOR UNIT WILL SHUT OFF

